


Vindicator

- 1) Feed the turn signal wires through the Vetter stalk and secure the assembly with the original nut and bolt.
- 2) Route the wiring through the mounting bracket, lock washer and hollow bolt. Tighten enough to keep the turn signal from rotating. (Illus. 9)

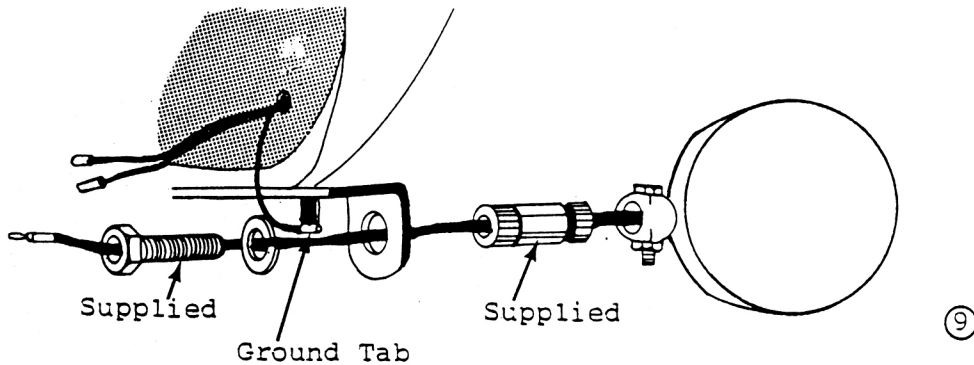

- 3) Connect the turn signal wires to the fairing wires following the color code on page 3. Connect the fairing's black ground wire to the terminal on the bracket.
- 4) Pull the slack wire into the fairing by reaching through the side pocket. Carefully twist the wires to keep them inside the fairing.

140 100 086

VINDICATOR ONLY:

Place the turn signal brackets on the support shelves. Tape the brackets in place to prevent movement when the fairing is being installed. (Illus. 6)

